

User's Guide



www.omega.com
e-mail: info@omega.com

PSW18P SERIES
ELECTRONIC PRESSURE SWITCH FOR PNEUMATIC APPLICATIONS



OMEGAnet® On-Line Service
www.omega.com

Internet e-mail
info@omega.com

Servicing North America:

USA:
ISO 9001 Certified

One Omega Drive, P.O. Box 4047
Stamford, CT 06907-0047
TEL: (203) 359-1660 FAX: (203) 359-7700
e-mail: info@omega.com

Canada:

976 Bergar
Laval (Quebec) H7L 5A1
TEL: (514) 856-6928 FAX: (514) 856-6886
e-mail: info@omega.ca

For immediate technical or application assistance:

USA and Canada:

Sales Service: 1-800-826-6342 / 1-800-TC-OMEGA®
Customer Service: 1-800-622-2378 / 1-800-622-BEST®
Engineering Service: 1-800-872-9436 / 1-800-USA-WHEN®
TELEX: 996404 EASYLINK: 62968934 CABLE: OMEGA

Mexico:

(001) 800-826-6342 FAX: (001) 203-359-7807
En Espanol: (001) 203-359-7803 e-mail: espanol@omega.com
Info@omega.com.mx

Servicing Europe:

Benelux:

Postbus 8034, 1180 LA Amstelveen, The Netherlands
TEL: +31 (0)20 6418405 FAX: +31 (0)20 6434643
Toll Free in Benelux: 0800 0993344
e-mail: nl@omega.com

Czech Republic:

Rudé armády 1868, 733 01 Karviná
TEL: +420 (0)69 6311899 FAX: +420 (0)69 6311114
Toll Free in Czech Rep.: 0800-1-66342 e-mail: czech@omega.com

France:

9, rue Denis Papin, 78190 Trappes
Tel: +33 (0)130 621 400 FAX: +33 (0)130 699 120
Toll Free in France: 0800-4-06342
e-mail: france@omega.com

Germany/Austria:

Daimlerstrasse 26, D-75392 Deckenpfronn, Germany
Tel: +49 (0)7056 3017 FAX: +49 (0)7056 8540
Toll Free in Germany: 0800-TC-OMEGA
e-mail: germany@omega.com

United Kingdom:
ISO 9002 Certified

One Omega Drive, River Bend Technology Centre
Northbank, Irlam, Manchester
M44 5EX, United Kingdom
Tel: +44 (0)161 777 6611 FAX: +44 (0)161 777 6622
Toll Free in the United Kingdom: 0800 488 488
e-mail: info@omega.co.uk

It is the policy of OMEGA to comply with all worldwide safety and EMC/EMI regulations that apply. OMEGA is constantly pursuing certification of its products to the European New Approach Directives. OMEGA will add the CE mark to every appropriate device upon certification.

The information contained in this document is believed to be correct, but OMEGA Engineering, Inc. accepts no liability for any errors it contains, and reserves the right to alter specifications without notice.

WARNING: These products are not designed for use in, and should not be used for, patient-connected applications.

PSW18P Series

APPLICATION

Ideal for Control of Air

FEATURES

- Rugged Compact Design
- Convenient Setpoint Adjustments
- High Cycle Life
- Vibration Resistant to 15g
- UL and CSA Approved Microswitch
- Gold Plated Contacts

SPECIFICATIONS

Ports/Mounting Plate	1/4" NPT
Adjustment Range	See table
Proof Pressure*	1150 PSI (80 bar)
Temperature Rating	
Ambient	14° to 175° F (-10° to 80° C)
Media	-4° to 175° F (-20° to 80° C)
Switching Element	SPDT Microswitch
Max. Switching Rate	100 cycles/minute
Repeatability	±3%; for vacuum ±4%
Electrical Connector	DIN 43650 Table A with Removable Cable Plug Adapter

*Note: Do not subject switch to proof pressure during normal operation. Even short pressure peeks must not exceed proof pressure.


MATERIALS OF CONSTRUCTION

Housing	Aluminum
Seal	
A & B	Fluorocarbon / Buna-N
C, D, E	Buna-N


PART NUMBER IDENTIFICATION

PART NUMBER	PRESSURE RANGE PSI	HYSTERESIS* PSI	
		Lower Range	Upper Range
PSW18PA	-14 – 0	2	3
PSW18PB	3 – 29	2	4
PSW18PC	7 – 120	4	9
PSW18PD	15 – 230	4	13
PSW18PE	15 – 435	15	73

*Note: Hysteresis is not adjustable. Maximum values are shown.




Terminals 1 - 2: Contacts open on rising pressure.
Terminals 1 - 3: Contacts close on rising pressure.

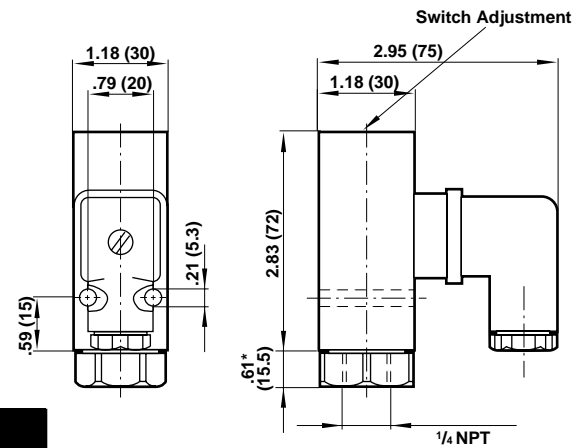

All dimensions in inches (mm)

SWITCH SELECTION AND MOUNTING INSTRUCTIONS

- Select a switch such that the desired switching point falls roughly in the middle of the adjustment range.
- Do not exceed switch electrical ratings. Use an appropriately sized relay when switching larger electrical loads.
- For media with pressure spikes and/or pulsating pressures, install a pressure snubber.
- For outdoor applications, sufficient protection must be provided.

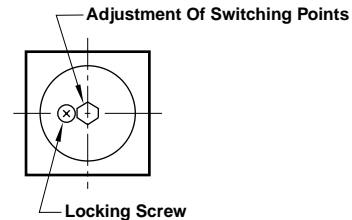

ADJUSTMENT OF SWITCHING POINT

Either the upper or the lower switching point may be adjusted. The opposite one is then fixed by the hysteresis characteristics of the switch. Use a pressure gauge for exact adjustment. Proceed as follows:

1. Loosen locking screw.
2. Adjust the switching point using a 5-mm hexagon wrench. Clockwise rotation increases switching pressure and counter-clockwise rotation decreases switching pressure. Low-end of adjustment range is reached when top of adjustment barrel is approximately level with top of switch housing. High-end of adjustment range is reached when adjustment barrel is fully CW.
3. Re-tighten locking screw.

MAKING AND BREAKING CAPACITY

LOAD LEVEL *	TYPE OF CURRENT	TYPE OF LOAD	V _{MIN} [V]	MAXIMUM PERMANENT CURRENT I _{MAX} [A] AT V			CONTACT LIFE	
				24 V	125 V	250 V	ELECTRICAL AT I _{MAX}	MECHANICAL AT I ≈ 0
Standard (relays, solenoids)	AC	Resistive	12	5	5	5	5 x 10 ⁴ switching cycles	approx 10 ⁷ switching cycles
	AC	Inductive PF ≈ .7	12	3	3	3		
	DC	Resistive	12	5	.4	–		
	DC	Inductive L/R ≈ 10 ms	12	3	.05	–		
Low (electronic circuits)	AC	Resistive	5	.34	.08	.04	2 x 10 ⁵ switching cycles	approx 10 ⁷ switching cycles
	DC	Inductive L/R ≈ 10 ms	5	.1	–	–		

*Load Level Explanation

PSW18P Series pressure switches have microswitch contacts with gold plating over silver base metal. The gold plating remains intact when "low level" voltage / current levels are observed. This feature assures highly reliable switching in low-level electronic circuits.

Standard applications do not require the gold plating – which will decay naturally when switching larger electrical loads.

Notes:

1. Reference conditions: 30 cycles per min and 86°F (30°C) ambient.
2. Reducing load current to 50% of I_{max} approximately doubles contact life.

NOTES

NOTES

WARRANTY/DISCLAIMER

OMEGA ENGINEERING, INC. warrants this unit to be free of defects in materials and workmanship for a period of 13 months from date of purchase. OMEGA's Warranty adds an additional one (1) month grace period to the normal one (1) year product warranty to cover handling and shipping time. This ensures that OMEGA's customers receive maximum coverage on each product.

If the unit malfunctions, it must be returned to the factory for evaluation. OMEGA's Customer Service Department will issue an Authorized Return (AR) number immediately upon phone or written request. Upon examination by OMEGA, if the unit is found to be defective, it will be repaired or replaced at no charge. OMEGA's WARRANTY does not apply to defects resulting from any action of the purchaser, including but not limited to mishandling, improper interfacing, operation outside of design limits, improper repair, or unauthorized modification. This WARRANTY is VOID if the unit shows evidence of having been tampered with or shows evidence of having been damaged as a result of excessive corrosion; or current, heat, moisture or vibration; improper specification; misapplication; misuse or other operating conditions outside of OMEGA's control. Components, which wear, are not warranted, including but not limited to contact points, fuses, and triacs.

OMEGA is pleased to offer suggestions on the use of its various products. However, OMEGA neither assumes responsibility for any omissions or errors nor assumes liability for any damages that result from the use of its products in accordance with information provided by OMEGA, either verbal or written. OMEGA warrants only that the parts manufactured by it will be as specified and free of defects. OMEGA MAKES NO OTHER WARRANTIES OR REPRESENTATIONS OF ANY KIND WHATSOEVER, EXPRESS OR IMPLIED, EXCEPT THAT OF TITLE, AND ALL IMPLIED WARRANTIES INCLUDING ANY WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. LIMITATION OF LIABILITY: The remedies of purchaser set forth herein are exclusive, and the total liability of OMEGA with respect to this order, whether based on contract, warranty, negligence, indemnification, strict liability or otherwise, shall not exceed the purchase price of the component upon which liability is based. In no event shall OMEGA be liable for consequential, incidental or special damages.

CONDITIONS: Equipment sold by OMEGA is not intended to be used, nor shall it be used: (1) as a "Basic Component" under 10 CFR 21 (NRC), used in or with any nuclear installation or activity; or (2) in medical applications or used on humans. Should any Product(s) be used in or with any nuclear installation or activity, medical application, used on humans, or misused in any way, OMEGA assumes no responsibility as set forth in our basic WARRANTY / DISCLAIMER language, and, additionally, purchaser will indemnify OMEGA and hold OMEGA harmless from any liability or damage whatsoever arising out of the use of the Product(s) in such a manner.

RETURN REQUESTS / INQUIRIES

Direct all warranty and repair requests/inquiries to the OMEGA Customer Service Department. BEFORE RETURNING ANY PRODUCT(S) TO OMEGA, PURCHASER MUST OBTAIN AN AUTHORIZED RETURN (AR) NUMBER FROM OMEGA'S CUSTOMER SERVICE DEPARTMENT (IN ORDER TO AVOID PROCESSING DELAYS). The assigned AR number should then be marked on the outside of the return package and on any correspondence.

The purchaser is responsible for shipping charges, freight, insurance and proper packaging to prevent breakage in transit.

FOR WARRANTY RETURNS, please have the following information available BEFORE contacting OMEGA:

1. Purchase Order number under which the product was PURCHASED,
2. Model and serial number of the product under warranty, and
3. Repair instructions and/or specific problems relative to the product.

FOR NON-WARRANTY REPAIRS, consult OMEGA for current repair charges. Have the following information available BEFORE contacting OMEGA.

1. Purchase Order number to cover the COST of the repair,
2. Model and serial number of the product, and
3. Repair instructions and/or specific problems relative to the product.

OMEGA's policy is to make running changes, not model changes, whenever an improvement is possible.

This affords our customers the latest in technology and engineering.

OMEGA is a registered trademark of OMEGA ENGINEERING, INC.

©Copyright 1999 OMEGA ENGINEERING, INC. All rights reserved. This document may not be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form, in whole or in part, without the prior written consent of OMEGA ENGINEERING, INC.

Where Do I Find Everything I Need for Process Measurement and Control? OMEGA...Of Course!

TEMPERATURE

- Thermocouple, RTD & Thermistor Probes, Connectors, Panels & Assemblies
- Wire: Thermocouple, RTD & Thermistor
- Calibrators & Ice Point References
- Recorders, Controllers & Process Monitors
- Infrared Pyrometers

PRESSURE, STRAIN AND FORCE

- Transducers & Strain Gages
- Load Cells & Pressure Gages
- Displacement Transducers
- Instrumentation & Accessories

FLOW/LEVEL

- Rotameters, Gas Mass Flow Meters & Flow Computers
- Air Velocity Indicators
- Turbine/Paddlewheel Systems
- Totalizers & Batch Controllers

pH/CONDUCTIVITY

- pH Electrodes, Testers & Accessories
- Benchtop/Laboratory Meters
- Controllers, Calibrators, Simulators & Pumps
- Industrial pH & Conductivity Equipment

DATA ACQUISITION

- Data Acquisition & Engineering Software
- Communications-Based Acquisition Systems
- Plug-in Cards for Apple, IBM & Compatibles
- Datalogging Systems
- Recorders, Printers & Plotters

HEATERS

- Heating Cable
- Cartridge & Strip Heaters
- Immersion & Band Heaters
- Flexible Heaters
- Laboratory Heaters

ENVIRONMENTAL MONITORING AND CONTROL

- Metering & Control Instrumentation
- Refractometers
- Pumps & Tubing
- Air, Soil & Water Monitors
- Industrial Water & Wastewater Treatment
- pH, Conductivity & Dissolved Oxygen Instruments