

Servicing North America:

USA: One Omega Drive, Box 4047
ISO 9001 Stamford, CT 06907-0047
Tel: (203) 359-1660 FAX: (203)359-7700
Canada: e-mail: info@omega.com

Canada: 976 Berger
Laval (Quebec) H7L5A1, Canada
Tel: (514) 856-6928 FAX: (514) 856-6886
e-mail: info@omega.ca

For immediate technical or application assistance:

USA: Sales Service: 1-800-826-6342 / 1-800-TC-OMEGA®
Customer Service: 1-800-622-2378 / 1-800-422-BEST®
Canada: Engineering Service: 1-800-872-0436 / 1-800-USA-WHEN®
TELEX: 99604 EASTLINK; 6298934 CABLE: OMEGA

Mexico: En Español: (001) 203 359-7803
e-mail: espanol@omega.com
Fax: (001) 203 359-7807 info@omega.com.mx

Servicing Europe:

Benelux: Postbus 8034, 1180 LA Amstelveen, The Netherlands
Tel: +31 (0)20 3472121 FAX: +31 (0)20 6434643
Toll Free in Benelux: 0800 0993344

Czech Republic: Pysuzska 184, 733 01 Karyvka, Czech Republic
Tel: +420 (0)39 6311899 FAX: +420 (0)39 6311114
Toll Free: 0800-1-66342 e-mail: info@omgskop.cz
e-mail: sales@omgskop.cz

France: 11, rue Jacques Carter, 78230 Guyancourt, France
Tel: +33 (0)1 61 37 2900 FAX: +33 (0)1 30 37 3427
Toll Free in France: 0800 466 342
e-mail: sales@omgeng.fr

Germany/ Austria: Dambertstrasse 26, D-75392 Deckelfingen, Germany
Tel: +49 (0)7056 9398-0 FAX: +49 (0)7056 9398-29
Toll Free in Germany: 0800 639 7678
e-mail: info@omega.de

United Kingdom: One Omega Drive River Bend Technology Centre
Northbrook, Hiron, Manchester,
M44 3SD United Kingdom FAX: +44 (0)161 777 6422
Tel: +44 (0)161 777 6611
Toll Free in United Kingdom: 0800-468-468
e-mail: sales@omega.co.uk

It is the policy of OMEGA to comply with all worldwide safety and EMC/EMI regulations that apply. OMEGA is constantly pursuing certification of its products to the European New Approach Directives. OMEGA will add the CE mark to every appropriate device upon certification.

The information contained in this document is believed to be correct. But OMEGA Engineering, Inc. accepts no liability for any errors it contains, and reserves the right to alter specifications without notice.
WARNING: These products are not designed for use in, and should not be used for, human applications.

WARRANTY / DISCLAIMER
OMEGA ENGINEERING, INC. warrants the unit to be free of defects in materials and workmanship for a period of 18 months from date of purchase. OMEGA will repair or replace the unit at no charge and shipping time. This warranty does not cover product warranty to cover handling and shipping time. This states that OMEGA's customers receive minimum coverage on each product.

If the unit malfunctions, it must be returned to the factory for evaluation. OMEGA's Customer Service Department will issue an Authorized Return (AR) number immediately upon phone or written request. Upon examination by OMEGA, if the unit is found to be defective, it will be repaired or replaced at no charge. OMEGA'S WARRANTY does not apply to defects resulting from fire, flood, or other catastrophic events or from misuse, modification, or unauthorized repair, or from design, parts, improper repair, or unauthorized modification. This WARRANTY VOID if the unit shows evidence of having been tampered with or shows evidence of having been damaged as a result of excessive corrosion, or current, heat, moisture or vibration; improper specification, misapplication, misuse or other operating conditions outside of OMEGA'S control. Components which were are not warranted, including but not limited to contact points, tubes, and valves.

OMEGA is pleased that OMEGA's design assumes responsibility for any operations or errors not assumed liability for any damages that result from the use of its products in accordance with information provided by OMEGA, either verbal or written. OMEGA warrants only that the parts manufactured by it will be as specified and free of defects. OMEGA MAKES NO OTHER WARRANTIES OR REPRESENTATIONS OF ANY KIND WHATSOEVER, EXPRESS OR IMPLIED, REGARDING THE TITLE, MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. LIMITATION OF LIABILITY: The remedies of purchaser set forth herein are exclusive, and the total liability of purchaser set forth to this order, whether based on contract, warranty, negligence, misrepresentation, strict liability or otherwise, shall not exceed the purchase price of the component upon which liability is based. In no event shall OMEGA be liable for consequential, incidental or punitive damages.

CONTRACTS: Equipment sold by OMEGA is not intended to be used nor shall it be used: (1) as a Spare Component under 10 CFR 21 (NRC), used in or with any nuclear installation or activity; or (2) in medical application or used on humans, should any application be used in or with any nuclear installation or activity, medical application, used on humans, or included in any way, OMEGA assumes no responsibility as set forth in our basic WARRANTY / DISCLAIMER language, and additionally purchaser will indemnify OMEGA and hold OMEGA harmless from any liability or damage whatsoever arising out of the use of the product(s) in such a manner.

RETURN REQUESTS / INQUIRIES
Direct all warranty and repair requests/inquiries to the OMEGA Customer Service Department. BEFORE RETURNING ANY PRODUCT(S) TO OMEGA, PURCHASER MUST OBTAIN AN AUTHORIZED RETURN (AR) NUMBER IN ORDER TO AVOID PROCESSING DELAYS. The assigned AR number should then be marked on the outside of the return package and on any correspondence.
The purchaser is responsible for shipping charges, freight, insurance and proper packaging to prevent breakage in transit.

FOR WARRANTY RETURNS: Please have the following information available BEFORE contacting OMEGA:
1. Purchase Order number under which the product was PURCHASED.
2. Model and serial number of the product under warranty, and
3. Repair instructions and/or specific problems relative to the product.

FOR NON-WARRANTY RETURNS: REPAIRS, consult OMEGA for current repair charges. Have the shipping information available BEFORE contacting OMEGA:
1. Purchase Order number to cover the COST of the repair, and
2. Model and serial number of the product, and
3. Repair instructions and/or specific problems relative to the product.

OMEGA's policy is to make running changes, not model changes, whenever an improvement in design or engineering is warranted. OMEGA is a registered trademark of OMEGA ENGINEERING, INC. © Copyright 2004 OMEGA ENGINEERING, INC. All rights reserved. This document may not be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form, in whole or in part, without the prior written consent of OMEGA ENGINEERING, INC.

Where Do I Find Everything I Need for Process Measurement and Control?


OMEGA... Of Course!
Shop online at www.omega.com

- TEMPERATURE**
 - Thermocouple, RTD & Thermistor Probes, Connectors, Panels & Assemblies
 - Wire: Thermocouple, RTD & Thermistor
 - Calibrators & Test Point References
 - Recorders, Controllers & Process Monitors
 - Infrared Pyrometers
- PRESSURE/STRAIN AND FORCE**
 - Transducers & Strain Gauges
 - Load Cells & Pressure Gauges
 - Displacement Transducers
 - Instrumentation & Accessories
- FLOW/LEVEL**
 - Rotameters, Gas Mass Flowmeters & Flow Computers
 - Air Velocity Indicators
 - Turbine/Paddlewheel Systems
 - Totalizer & Batch Controllers
- pH/CONDUCTIVITY**
 - pH Electrodes, Testers & Accessories
 - Benchtop/Laboratory Meters
 - Controllers, Calibrators, Simulators & Pumps
 - Industrial pH & Conductivity Equipment
- DATA ACQUISITION**
 - Data Acquisition & Engineering Software
 - Communications-Based Acquisition Systems
 - Plug-in Cards for Apple, IBM & Compatibles
 - DataLogging Systems
 - Recorders, Printers & Plotters
- HEATERS**
 - Heating Cable
 - Cartridge & Strip Heaters
 - Immersion & Band Heaters
 - Flexible Heaters
 - Laboratory Heaters
- ENVIRONMENTAL MONITORING AND CONTROL**
 - Metering & Control Instrumentation
 - Refractometers
 - Pumps & Tubing
 - Air, Soil & Water Monitors
 - Industrial Water & Wastewater Treatment
 - pH, Conductivity & Dissolved Oxygen Instruments

M19150204



Shop online at
omega.com
www.omega.com
e-mail: info@omega.com

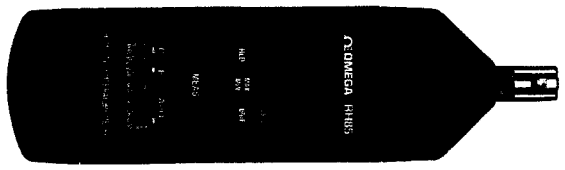

RH85
Digital
Thermo-Hygrometer

INTRODUCTION

This instrument is a portable easy use 3 1/2 digit, compact digital Thermo-Hygrometer designed for simple one hand operation. It use NTC as temperature sensor, and a thin polymer capacitive type relative humidity sensor as the hygrometer sensor.

SAFETY INFORMATION

It is recommended that you read the safety and operation instructions before using the thermometer.

CAUTION

- Do not immerse the hygrometer sensor head into liquids since this causes permanent damage to the sensor.
- The meter when not in use, please use protective metal cap cover the sensor head and screw it to extend sensors life.

SPECIFICATIONS

GENERAL

Display:

3 1/2 digit liquid crystal display (LCD) with maximum reading of 1999.

Low battery indication:

The "E3" is displayed when the battery voltage drops below the operating level.

Measurement rate:

0.5 times per second, nominal.

Accuracy:

Stated accuracy at 23°C ± 5°C, <75% R.H.

Operating environment:

0°C to 55°C at <75% R.H.

Storage environment:

-20°C to 55°C at <80% R.H.

Battery:

3 pcs 1.5V (AAA size) UM-4 R03.

Battery Life:

200 hours typical with carbon zinc battery.

Dimensions(HxWxD):

167mm(H) x 48mm(W) x 24mm(D).

Weight:

87g including battery.

ELECTRICAL

TEMPERATURE

Temperature Scale:

Celsius or Fahrenheit user-selectable.

Temperature Sensor:

NTC.

Measurement Range:

-20°C to 60°C / -4°F to 140°F.

Resolution:

0.1°C/°F.

Accuracy:

±1.0°C on -20°C to 0°C, 45°C to 60°C

±0.5°C on 0°C to 45°C

±2.0°F on -4°F to 32°F, 113°F to 140°F

±1.0°F on 32°F to 113°F

RELATIVE HUMIDITY

Humidity Sensor:

Electronic capacitance polymer film sensor. (The sensor is unaffected by water condensation, is immune to most reagent vapors).

Measurement Range:

0% to 100%RH.

Resolution:

0.1%RH.

Accuracy:

±2.5%RH (10% to 90%RH) @25°C

±5.0%RH (<10%, >90%RH) @25°C

Sensor Response Time for 90% of Total Range:

60sec with 1m/s air movement

Sensor Hysteresis (excursion) of 10% to 90% to 10% RH:

±1%RH with 1m/s air movement.

Sensor Temperature Dependence:

Negligible between 0°C to 50°C.

OPERATING INSTRUCTIONS

MEAS (Measure) Button

Pressing "MEAS" button to turn on the meter and press again to turn off the meter.

APO Switch

Slide the APO switch to right to enable APO function. When APO function is enable the meter will power off automatically after 15 minutes. When the APO mode is active, "APO" will display on the LCD. When the power is down, press "MEAS" button to turn on the meter.

Dew Point / Wet Bulb:

Press "UNIT" button for more than 2 seconds to change the temperature unit dew point or wet bulb. The temperature unit "d" dew point or "WB" wet bulb is displayed in the lower left hand side corner of the display.

DATA HOLD Button

Pressing the "HLD" button to enter the Data Hold mode, the "HLD" annunciator is displayed. When DATA HOLD mode is selected, the hygrometer held the present readings and stops all further measurements. Pressing the "HLD" button again cancels DATA HOLD mode, causing hygrometer to resume taking measurements.

MAX MIN Record Mode

Press "MAXMIN" button to enter the max/min record mode. In this mode, the APO function, "C"/F switch and "UNIT" button are disabled. Push "MAXMIN" button to cycle through the MAX(maximum), MIN(minimum), MAX-MIN, AVG(average) and REC(record) reading.

In this mode, press "HLD" button to stop the recording of measurement, but the recorded value of maximum, minimum, maximum-minimum, average could be read by pressing "MAX/MIN" button.

To prevent accidental loss of Max, Min and AVG data, in this mode can only be cancelled by pressing and hold down the "MAX/MIN" button for more than 2 seconds to exit and erased recorded reading.

°C/F Selecting the Temperature Scale

Readings are displayed in either degrees Celsius(°C) or degrees Fahrenheit(°F). To change the temperature scale, set the "C"/F switch to °C or °F.

OPERATION

- Remove protective cap.
- Pressing "MEAS" button turns on the power.
- Set the "C"/F switch to change the temperature scale.
- Read the display.
- Cover sensor head to extend sensor life when not in use.

SPECIAL CONSIDERATIONS

- Before a reliable measurement can be made, the measuring hygrometer and medium to be measured must be in temperature and humidity equilibrium.
- Temperature measurement errors
Due to too short measurement time, sunshine during the measurement, heating, cold outer walls, air draft (e.g. fans), radiating hand and / or body heat etc.
- Humidity measurement errors
Due to steam, water splashes, dripping water or condensation (not water condensate) on the sensor etc. However, repeatability and long-term stability are not impaired by this.
- Contamination
By dust in the air or measurements in powdery substances. This can be largely avoided by using a corresponding filter. The filter must be cleaned or replaced periodically depending upon the degree of contamination of the measuring site.

MAINTENANCE

Battery Replacement

- Power is supplied by three 1.5V (AAA size) batteries.
- The "E3" appears on the LCD display when replacement is needed. To replace the batteries, remove the screw from the back of the meter and lift off the battery cover.
- Remove the batteries from battery contacts and replace.
- When not in use for long period of time, remove the batteries.
- Don't store in a location with high Temp. or high humidity.

Cleaning

Periodically wipe the case with a damp cloth and detergent, do not use abrasives or solvents.